


Triproof RH-F15

Außenmaße: 1570(L) x 85(B) x 78(H) mm /
50W
white




Produkt

Seriennummer	RH-F15
Hersteller	Rhein Lighting GmbH
Spannung	AC 85V ~ 265V (50/60Hz)
Verbrauch	50W
Lampentyp	Triproof
Treiber	include / tridonic
UGR	<22

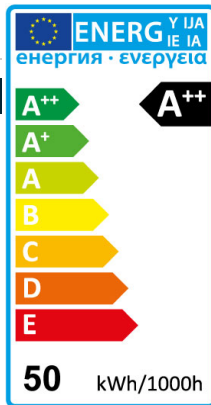


Lichtverteilungskurve

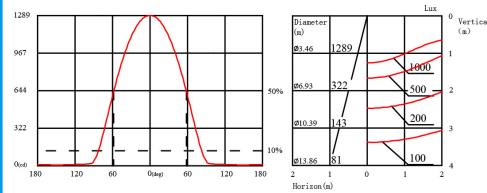

Technische Details

Seriennummer	RH-F15
Lichtstrom (lm)	120 lm /w
Frequenz (Hz)	50/60
Eingangsstrom (mA)	1200
Nennleistung Verbrauch (W)	50
Leistungsfaktor	>0,9
Lichtstromwartungsfaktor	L70
Dimmer-Funktion	non-dimmable
UGR	<22
LED-Chips	Epistar
Abstrahlwinkel (°)	120
Umgebungstemperatur (°C)	-20 ~ +48
Lebensdauer (Std.)	50000
Farbtemperatur (K)	3.000 ~ 6.500
CRI (Ra)	>80
Schutzart	IP 65
Abmessungen (mm)	Außenmaße: 1570(L) x 85(B) x 78(H) mm
Material	ABS / PMMA
Gewicht (g)	2333
Energieeffizienzindex	A++
Energieverbrauch (kWh/1000h)	60
Zertifikate	CE

Produktabmessungen (Einheit: mm)

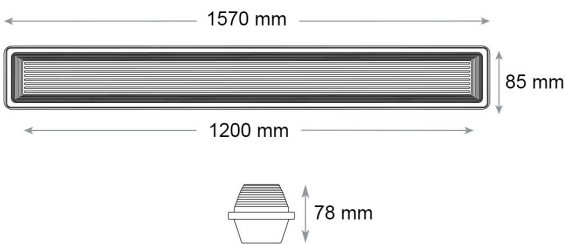

Spezifikationen

- It is suitable for indoor and outdoor applications
- Constructed of one-piece molded, durable fiberglass-reinforced polyester and UV-stabilized, impact-resistant diffused acrylic shielding, it is wet location listed and water-tight sealed for IP65 rating, which provides protection from external elements.
- The operating temperatures range is -20° C to 48° C, allowing for cold to hot weather environment installations.

Anwendungsbereich

Department Stores, Factories, Gas stations, Exhibitions, Warehouses